

StrapPack[®]

Compact Model for Printing Industry



RQ-8IR2

RQ-8IR2

Compact Model Ideal for Office or Printing Applications 

■ COMPACT!

Space-efficient design with internal reel unit utilizing a standard size strap coil.

■ VERY FAST!

1.5 seconds per strap (approximately 40 straps per minute).

■ RE-FEED FUNCTION

Features automatic resetting of the machine for continuous operation even if a strap forwarding failure were to occur.

■ SINGLE PHASE

Easy installation and operation with common household power supply.

■ VARIABLE TENSION

A single dial provides a wide range of tension for all packages.

■ QUICK WARM-UP HEATER

Only 25 seconds required to reach operating temperature. Strap cycle cannot be initiated until heater warms up to operating temperature.

■ EMPTY STRAP COIL DETECTION

Operation automatically stops when the strap coil is empty plus an optional warning signal is available. Easy removal of any excess strap ensures uninterrupted operation.

■ AUTOMATIC STRAP EJECTION

An empty strap loop is automatically ejected when a strapping cycle is accidentally activated without a package in place.

■ SELF-DIAGNOSTIC MECHANISM


A programmable microprocessor constantly monitors critical functions - any irregularity detected is immediately displayed.

■ PRECISE STRAP PLACEMENT

Newly designed bandway offers accurate strap positioning without twists or misaligned joints.

■ IMPROVED ARCH CONFIGURATION

New arch configuration accommodates U.S. Mail trays with 690mm (27") opening.

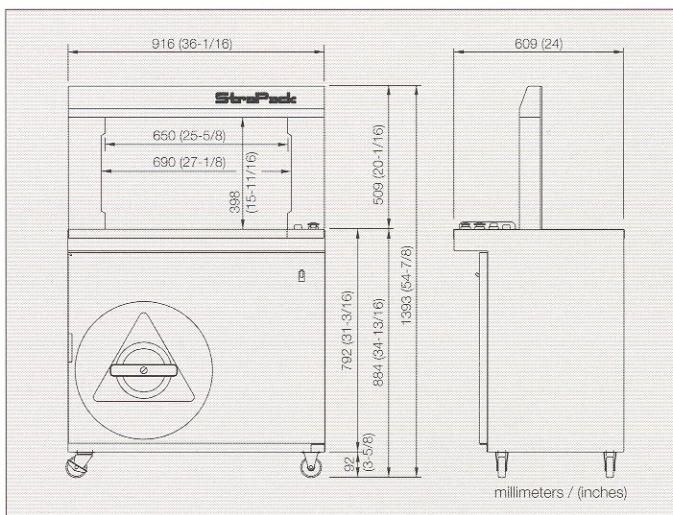

■ Standard Specifications

| | | | |
|----------------------|--------|---|--|
| Dimensions | Width | 916mm | 36-1/16 in. |
| | Height | 1393mm | 54-7/8 in. |
| | Depth | 609mm | 24 in. |
| | Weight | 168kg | 370 lbs. |
| Table Height | | 884mm | 34-7/8 in. |
| Arch Size | | W 690 × H 400mm | W 27-1/8 × H 16 in. |
| Package Size | Max | W 620 × H 380mm | W 24-7/16 × H 15 in. |
| | Min | W 80 × H 30mm | W 3-1/8 × H 1-3/16 in. |
| Joint / Strap / Coil | | heat seal / polypropylene / ID 200 × OD 450 × W 200mm | heat seal / polypropylene / ID 8 × OD 18 × W 8 in. |
| Strap Width | | 5, 6, 9, 12mm | 1/4, 3/8, 1/2 in. |
| Strap Tension | | Max. 80kg 150mm stroke | Max. 176 lbs. 6 in. stroke |
| Speed | | 1.5 sec. / strap 40 straps per min. | |
| Power Supply | | 100, 110, 200, 220V 1 phase 50 / 60Hz 0.65KVA | |

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2000 Strapack Corporation

DISTRIBUTED BY:

STRAPACK CORPORATION

1-2-17, Higashi Shinbashi, Minato-ku, Tokyo 105-0021, JAPAN
Phone 81-3-3289-1161 Fax. 81-3-3289-1160
(URL) <http://www.strapack.com>
(E-mail) info@strapack.com

STRAPACK INC.

30860 San Clemente St. Hayward, CA 94544 U.S.A.
Phone 1-510-475-6000 Fax. 1-510-475-6090